


Resetting the thermostat valve



Remove the cap opposite to the lever and undo the screw inside.

Remove the knob and you will see a plastic clip behind, inserted between the outer and inner part of the thermostat.

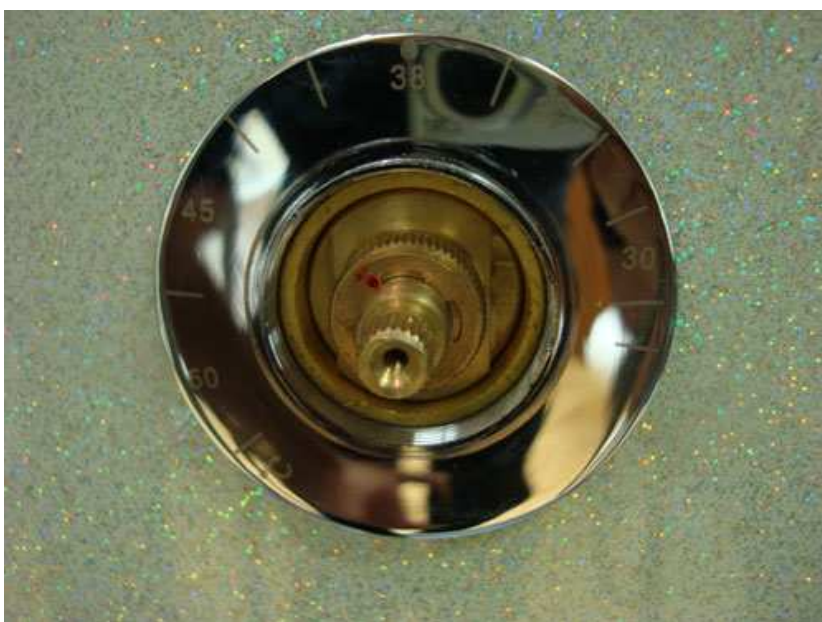

Remove this, and using a pair of pliers turn the knob fully to the left.



Providing your plumber has connected the water up correctly (hot comes in on the right looking at the unit from behind) you should now have hot water. Now turn the unit fully to the right (clockwise) and you should have cold water.

If this does work then you can reassemble the unit as per earlier steps, remembering to line up the plastic insert which should have a line at the top which should line up at the 12 O'clock position with the 38 degrees setting.



Replace the knob with it set to the far right hand position (somewhere around 4 O'clock) and fasten it into position and replace the screw cover. When you turn the lever to the 38 degrees position you should click the button down and hot water should come through!